



ISI-321TA

W x D x H inch(mm)
18" (460) x 37" (935) x 36" (920)



Feature



SIMPLICITY



PERFORMANCE



RELIABILITY



EXCELLENT TASTE



Direct Motor Drive (operation)

Less noise & Less vibration



Agitator operation

Keep ice cream mix liquid separation / Circulate the ice cream mix evenly for temperature maintenance



Mix Hopper

One, 17.5 liter (4.62 gallon) / Maintain the temperature of mix, under 5°C (41°F) in Auto & Standby modes



Mass Storage Capacity

The Large Mix Hopper & Cylinder can serve Ice Cream & Yogurt continuously.



Powerful Production Capacity

Oversized compressor cuts down on production time.



Freezing Cylinder

One, 3.2 liter (0.85 gallon) x 1EA



Artificial Intelligence Control System

A.I Control System makes high quality soft serve ice cream.

Dimensions

Dimensions	Net	Gross
Width	18" (460 mm)	21" (530 mm)
Depth	37" (935 mm)	36" (925 mm)
Height	36" (920 mm)	37" (935 mm)
Weight	309 lbs (143.5 kg)	334 lbs (151.5 kg)

Certification



7, GEOMDAN-RO 54BEON-GIL, SEO-GU, INCHEON, KOREA


• TEL : +82-32-814-2160 Ext. 210, 220 • FAX : +82-32-814-1798

• WEB : www.icetro.com • E-mail : sales@icemaker.co.kr



SINGLE FLAVOR TABLETYPE SOFT ICE CREAM MACHINE

Dimension – Unit : mm (inch)

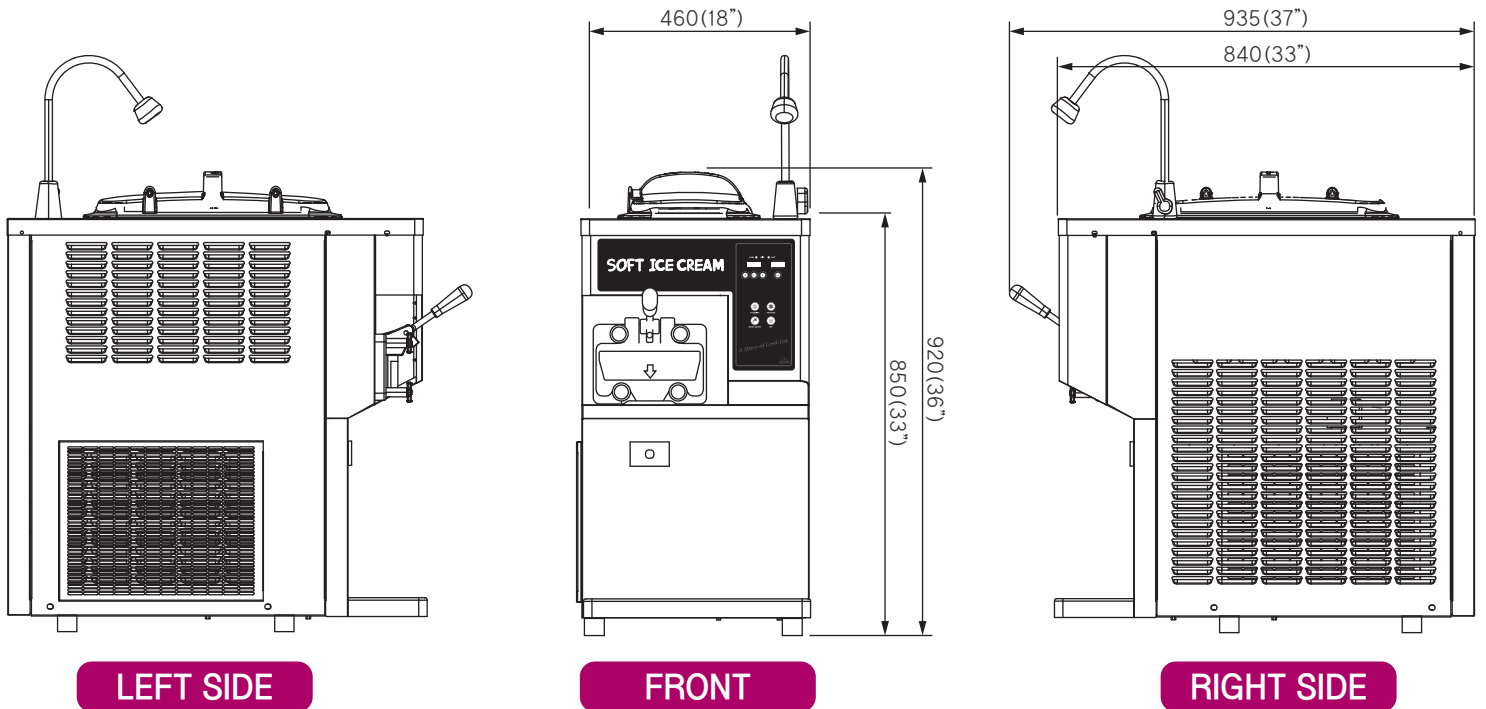

LEFT SIDE

FRONT

RIGHT SIDE

Specification


Model	Mix Hopper Capacity	Cylinder Capacity	Consecutive Dispensing	Dasher Motor	Max. Production	First Dispensing
ISI-321TA	17.5 liter (4.62 gallon)	3.2 liter (0.85 gallon)	20~24 cups(100 cc/3.5 oz)	0.75 KW	30 kg (66.14 lbs/h)	8~10 min
	Cylinder Compressor	Power Consumption	Mix Hopper Compressor	Cooling System	Electrical Option	
	1.5 HP (R-404A)	2,000 W	0.35 HP (R-134A)	Air-Cooled	220~240V/50Hz/1PH 208~230V/60Hz/1PH	

※ Production Capacity may vary depending on ambient temperature.


Detail View



Simple & Easy to access operating / control system on the front touch panel

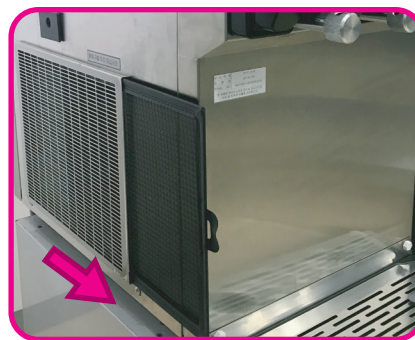

Pull out to remove the Air filter at the left side

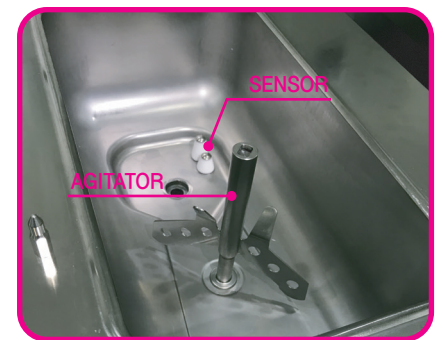

Agitator Operation
Automatically Detect MIX OUT & MIX LOW by the sensor

※ Design and Specification are subject to change without notice.